


## STAVEBNÍ PŘIPRAVENOST

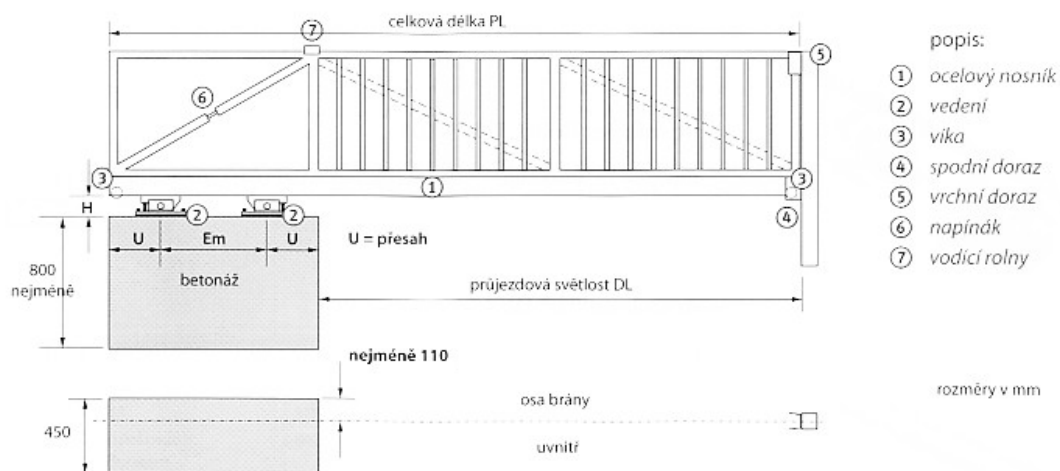

	výška H (mm)	přesah U (mm)
LWS 101	58	225
LWS 111-S, -L	85	275
LWS 125 <sup>S</sup> -S, -L	110	275
LWS 125-X	110	325

<b>P-ROLL 70</b>				rozměry (mm)
DL	PL	Em		max. nosnost (kg/bm)
3000	4300	850		25
3250	4700	1000		25
3500	5200	1250		25
3750	5600	1400		25
4000	6000	1550		25

<b>P-ROLL 80</b>					rozměry (mm)
DL	PL	Em	v e d e n í		max. nosnost (kg/bm)
			S	L	
3000	4300	750	50	60	
3250	4700	900	50	60	
3500	5000	950	50	60	
3750	5400	1100	50	60	
4000	5700	1150	50	60	
4200	6000	1250	50	60	
4500	6400	1350	40	50	
4750	6800	1500	40	50	
5000	7150	1600	40	50	
5250	7500	1700	40	50	
5500	7850	1800	40	50	
5700	8200	1950	40	50	
6000	8200	1650	30	40	

<b>P-ROLL 125</b>							rozměry (mm)
DL	PL	Em	v e d e n í				max. nosnost (kg/bm)
			S, L	X	S	L	
3500	5000	950	850	75	120	150	
4000	5700	1150	1050	75	110	150	
4500	6400	1350	1250	70	100	130	
5000	7100	1550	1450	65	90	130	
5500	7800	1750	1650	60	85	120	
6000	8500	1950	1850	55	80	120	
6500	9200	2150	2050	/	75	110	
7000	10000	2450	2350	/	70	110	
7500	10600	2550	2450	/	65	100	
8000	11300	2750	2650	/	60	100	
8500	12000	2950	2850	/	55	90	
9100	12000	/	2350	/	/	60	